

A scenic view of a fjord with steep mountains and a cruise ship. The water is a deep blue, and the mountains are covered in green vegetation with patches of snow. A small town is visible on the left side of the fjord. A large white cruise ship is sailing on the right side of the water.

MARINE SCRUBBER WASTEWATER TREATMENT CASE




The water treatment solution from LiqTech secures compliance with environmental requirements and reduces handling costs of scrubber sludge

The Case

Ships trading in designated emission control areas will have to either use fuel oil with a sulphur content of less than 0.10% (MGO) or to comply with the SO_x requirements by using an exhaust gas cleaning system, or "scrubber." There is a significant cost difference between low sulphur fuel and the cheaper conventional fuel (heavy fuel). By installing scrubber systems, vessel owners can comply with the new IMO requirements and at the same time benefit from the cost advantage of using conventional heavy fuel.

LiqTech has delivered numerous scrubber wastewater treatment systems to be integrated with scrubber towers. The combined scrubber and wastewater treatment solution reduces sulphur emissions in the exhaust gas and turbidity together with poly aromatic hydrocarbons (PAH) in the discharged wastewater.

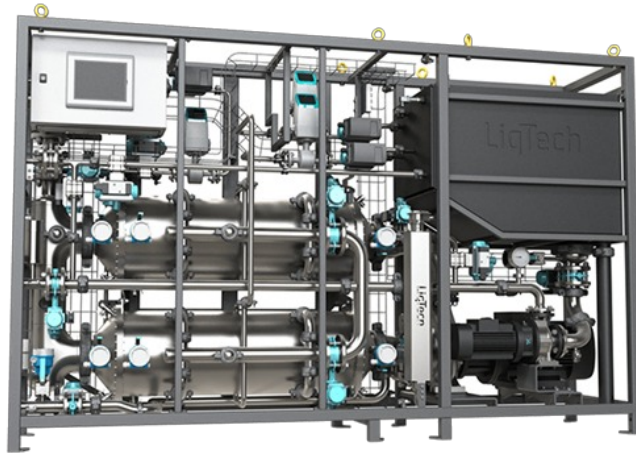

System Design

LiqTech SiC membrane system for 6 m³/h or 26 GPM scrubber wastewater.

LiqTech System Design

The advantages of a LiqTech wastewater treatment solution

The scrubber wastewater is treated by mechanical separation – size exclusion, which results in an improved and consistent quality compared to gravity separation based on density differences. In addition to improved quality of the discharge water, the combination of membrane technology with filter press dewatering greatly reduces the volume of scrubber sludge compared to gravity based separation solutions.

The wastewater treatment package

LiqTech offers complete wastewater treatment solutions consisting of:

1. Coarse pre-filtration
2. Fully automated SiC membrane system
3. Module for dewatering of membrane reject

Wastewater from the scrubber process tank is pumped to the membrane system, which removes soot particles, heavy metals and unburned fuel residues. The treated water is discharged while monitoring selected parameters. The concentrate of particles from the membrane system is dewatered by a filter press in order to reduce the final volume of scrubber sludge. The solution is monitored and controlled by PLC.

Materials and Components

The SiC ceramic membranes from LiqTech have proven to be extremely robust and offer a high capacity with a very small footprint. Further, the membranes are chemically inert and very temperature resistant. Membrane housings are made of glassfiber reinforced plastics (GRP) and polypropylene piping, or duplex steel. The modular design and material selection is based on marine requirements and standards.

We are here to help you



Kenneth Højrup Johansen

VP Sales

Phone: +45 2055 5217

khj@liqtech.com

LiqTech Water A/S

Phone: +45 7020 7258

water@liqtech.com

<https://liqtech.com/water>



Michael Westerby

Technical Sales Manager - Marine Solutions

Phone: +45 3010 3200

mwe@liqtech.com

LiqTech Water A/S

Phone: +45 7020 7258

water@liqtech.com

<https://liqtech.com/water>